deam

www.deasystem.com



Automation for sliding gates

gulliner IIII



DEA

Automation for gates, doors and barriers

gulliner

FOR GREAT PERFORMANCES

Automation for industrial sliding gates



CE

- Product in conformity with European standards.
- Electromechanical automation, 230v a.c., 400v a.c.
- · Suitable for gates from 1500 kg to 3800 kg.
- Suitable for intensive, industrial and collective operation.
- Easy to install, thanks to the adjustable fixing plate.
- Integrated limit-switch.
- · Simple unlocking system by key.
- Electromechanical brake to get a more immediate stop of the gate.
- Internal ventilation to get a more intensive duty.
- Grease soaked gear motor.


GULLIVER is the automation for sliding gates from 1500 kg to 3800 kg, where an intensive duty is required. The sturdiness and the choice of the details are a guarantee of reliability in time. Thanks to the electronic clutch, safety is assured. The control board is integrated in the case, aiding the already quick installation of the Gulliver.

THE PRODUCTS



Lato

DIMENSIONS






Simple unlocking system by key



Integrated limit-switch in opening and closing

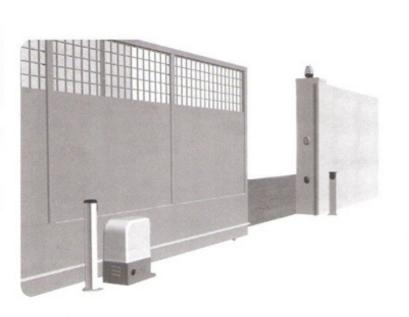

ACCESSORIES

·

Livi 550PL

Art. 113

Stop/Pass

Galvanized steel rack 1000x30x12mm with zinc-plated spacers.



Art. M6

M6 Livi galvanized gear M=6Z=12Øe=84.



Safety Beams Reliable and easy to install.

TECHNICAL INFORMATION

Model	1503E	2200RRT
Motor power supply (V)	230 V a.c.	380 AC up to 415AC
Capacity (W)	560	1200
Incorporated condenser (uF)	30 uF	-
Duty cycle	60%	80%
Max thrust (N)	875	1650
Max gate weight (Kg)	1500 up to 2500	2200 up to 3800
Operating temperature (°C)	-20°÷60°	-20°÷60°
Speed (m/min)	10	10
Motor thermal protection (°C)	140°	-
Protection level	IPx4	IPx4
Weight with packing (Kg)	30	30





DEA SYSTEM S.p.A.

DEALER STAMP

Automation for gates, doors and barriers

Via della Tecnica, 6 - 36013 PIOVENE ROCCHETTE (VI) - ITALY Telefono: +39 0445 550789 - Fax: +39 0445 550265 www.deasystem.com - info@deasystem.com