


Leaders in gate automation products

• Convenient • Improves Security • Saves Time • Unbeatable Value • Reliable • Peace of Mind

SW600 Swing OPERATOR



SPECIAL PROTECTION

Our system is equipped with a high current sensor controller to protect the DC motor, lock coil, and gear box from damage and hence enabling a lifespan 3 times of the conventional type.

Control Board Features


Voltage in	230VAC/24AC/D0
Voltage out (motor)	24VDC
Voltage out (accessories)	24VDC
Features sets for private property use	Yes
Features set for complex or parking lot use	Yes
Stand by power	6-9 Watt
Number of wings to be controlled	1 or 2
Transmitter memory (combine)	1000
Degree of enclosure protection	IP44
Fuses	3 Amp
Outside antenna connection	Yes
Transformer - run only option	Yes
Transformer trickle charge run low voltage	Yes
Battery backup	Optional
Battery backup power supply	2x12V/7.0AH
Battery backup lifetime in case of power outage	80 cycle
Soft start/stop	Yes
Force trimmer adjustment	Yes
Bipart delay trimmer	Yes
Accessory power supply	300mA
Switched accessory output for low power standby	Yes
Independent photocell input (open/close)	Optional
Independent safety edge inputs (open/close)	Yes
Service indicator with LED	Yes
E-Lock control (24V)	Yes
Solenoid lock control (24V)	Yes
Flashing light connection (24V)	Yes
Superhet plug-in RF module (433MHz standard)	Yes
Single Swing	Yes



Operating Voltage	DC 24V Supply	
Output Power	120W / DC Motor	
Max. Weight of Gate	300/600kg heavy duty	
Rotary Speed	8sec. / 90 degree	
Transmission Type	Rotary Lever 360 degree	
Dual Speed	Yes	
Safety Device	Mechanical Clutch (Patented)	
IR Safety Beam	Optional	
Safety Limit Timer	Yes. High Current Sensor (Master timer)	
Automatic Lighting Control	Yes including photo sensor control	
Remote Controller	2 channel UHF PWM	
Electric Lock	Yes	



UK PATENT NO.: 2264534 MY 108093 - A

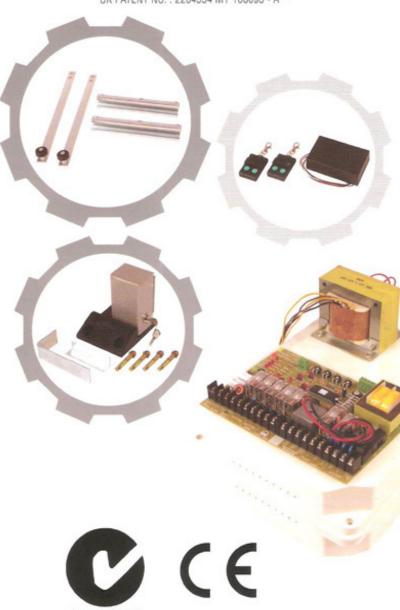

Due to our continuous improvement to our products, some specifications may be different from the list. Some features may not be available due to differences among our marketing zones and may also due to some restriction from local authority of your country. Please refer to the local authorised dealer for details.

